

5M Motorized Bullet


FW7930-PXM



Key Features

- 1/2.9" 6.82M PS CMOS sensor
- Motorized Auto Focus
- Max. 15fps@5M (2592x1944) / 30fps@4M (2688x1520)
- Quadruple stream (H.265, H.264, M-JPEG, JPEG)
- WDR (>100dB), Dynamic adjusting
- ONVIF(Profile S) standard

Dimensions

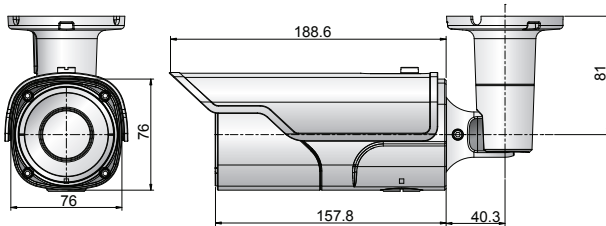

Accessory

Technical Specifications

Camera	
Image Sensor	1/2.9" 6.82M Progressive Scan CMOS
Lens	5.0 ~ 50.0mm Motorized, auto IRIS (Optional 2.8~12.0mm Motorized)
Min. Illumination	Color: 0.06 lux, B&W: 0 lux
IR	4 POWER IR LED (Removable IR cut filter)
PoE	IEEE 802.3at
Video	
Streaming	Quadruple Streaming
Compression	H.265, H.264, M-JPEG, JPEG
Resolution	2592x1944, 2688x1520, 2048x1536, 1920x1080, 1280x720, 704x480, 640x352, 320x176, 160x96
Max. Frame Rate	30fps, 25fps, 15fps@2592x1944
Bit Rate Control	VBR, CBR (H.264 only, 32K~12Mbps), AVBR
Frequency Control	60Hz, 50Hz
Buffer	Max. 5.6Mbyte pre/post alarm buffer
Privacy Masking	8 privacy zone
Motion Detection	On (144 block selection), Off
Video Analytics	Optional (Face Detection, Tampering, Tripwire etc)
Smart Video	ROI (Region of Interest)
Stabilizer	-
WDR & BLC	WDR (On, Off), BLC (Disable/Enable)
Day & Night	TDN (Auto, B&W, Off) Removable IR cut filter
White Balance	Auto, Manual (various lighting condition)
Noise Filter	3DNR (On, Off)
Image Adjustment	Hue, Saturation, Brightness, Contrast, Brightness
Sharpness	Level 0~11
Auto Gain Control	Level 0~72
Shutter Speed	Auto, Manual (1/30~1/32000)
Sense-up	Level Off/1/2
Flip	Vertical (On, Off), Horizontal (On, Off)
PTZ	-
Interface	
Video Out	1 CVBS
Audio In/Out	2 way (1 in, 1 out)
Audio Compression	G.711
Alarm In/Out	1 DI, 1 DO
Serial Port	-
Peripherals	-
Memory Slot	2 Micro SD Slot (up to SDXC 128GB per each)
Network	
LAN	10/100-base-T (auto sensing)
Protocol	HTTP, RTP/RTSP(Uni/Multicast), TCP/IP(v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP, DHCP, NTP, SMTP client, uPnP&etc
Standard	ONVIF (Profile S)
Viewer	Browsers (Microsoft Internet Explorer), CMS, VLC
Dynamic IP	DDNS (www.ipccvdns.com)
Smart Solution	FlexWATCH Mobile (iOS, Android), IPCAMVISION (iOS, Android)
Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List
Hardware	
System	32bit Embedded Linux, 256Mbyte SDRAM, 128Mbyte NAND Flash
Approvals	KC/FCC/CE, RoHS, IP66
Working Condition	-20°C ~ +60°C, ~90% RH
Power Supply	SMPS, DC 12V/3A & AC 24V
Power Consumption	Max. 7.8W
Dimension	85Ø x 280(L) x 80(H) mm
Weight	About 1250g without Power Supply