KOREAN CCTV CAMERA
SURE

SURE B74-M252-F3

Camera Digital Full HD Dạng Bullet

Các Tính Năng Chính

- 1/2.8" 2.13 MP Sony Stavis CMOS
- Color : 0.03 Lux(50IRE) / 0.01 Lux(15IRE)
- Support HD-SDI, EX-SDI, EX-SDI 2.0 video output
- 1080p30/25, 720p30/25, 720p50/60
- Megapixel fixed lens f=3.6mm
- Digital Noise Reduction 3DNR
- OSD Control (option)
- Backlight control WDR/BLC/HLC
- True Day&Night (ICR)
- De-Fog
- Protection rating IP66
- 63 IR LED range up to 45m
- **PoC - Power over Coax**

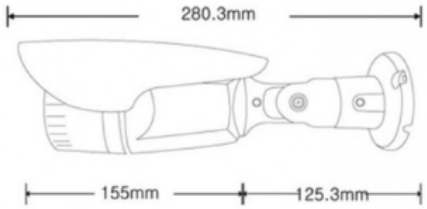



THÔNG SỐ KỸ THUẬT

Type	Bullet
Sensor	1/2.8" 2.13 MP Sony Stavis CMOS
Lens	Megapixel 3.6mm
View Angle	84°
Illuminator	63pcs 850nm IR LED
Video Output	HD-SDI, EX-SDI (1.0, 2.0)

Resolution	1080P25(30) / 720P25(30) / 720P50(60)
Min. Illumination	Color: 0.03 Lux(50IRE) / 0.01 Lux(15IRE) | B/W: 0.015 Lux(50IRE) / 0.007 Lux(15IRE)
Frequency	30Hz/ 25Hz
Shutter	AUTO,MANUAL (1/30(1/25) ~ 1/30Ksec),FLICKER
AGC	Level 0 ~ 10
ACE	OFF,LOW,MIDDLE,HIGH
Backlight	OFF/HLC/BLC/WDR
Defog	AUTO/Manual
Smart IR	OFF/ ON
Sense-Up	OFF/AUTO/X2~X32
Day & Night	COLOR/BW/EXTERN/AUTO
White Balance	AUTO/AUTODEXT/PRESET/MANUAL
Noise Reduction	OFF/LOW/MIDDLE/HIGH
Image Adjusment	SHARPNESS, GAMMA
Flip	OFF/H-MIRROR/V-MIRROR
Voltage	DC 12V(±10%), **PoC 24V**
Power Consumption	IR OFF: 150mA / IR ON: 700mA (MAX)
Dimension	77.7(W)x87.3(H)x280.3(L) mm
Weight	About 0.85kg
Operating Temperature	-10°C ~ +50°C
Operating Humidity	MAX 90% RH
Approval	KCC, FCC, CE, RoHS, IP66